


# Installation Instructions

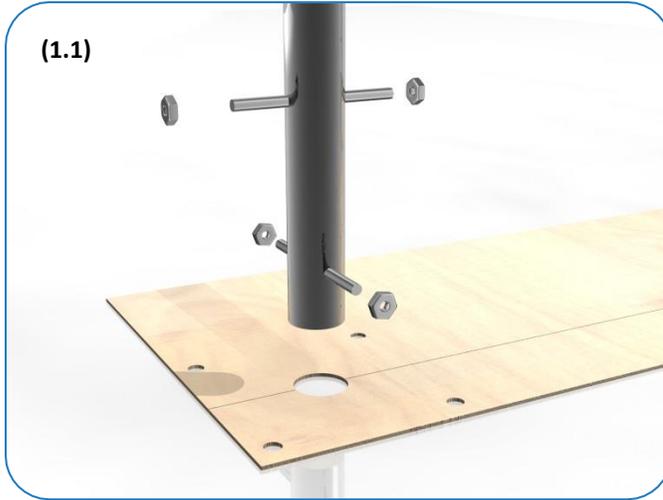

1. Attach M10x150 Bar and Nuts to each of the 3 Legs.  
**(1.1) (See Assembly Guide)**


2. Use wooden jig to mark out hole positions for each of the 3 legs in desired location upon decision from customer. .

3. Excavate 3 holes for the Steel legs **250mm diameter by 400mm deep. (See GF Post Installation Sheet)**

4. Locate (lower) legs into holes making sure they are vertical and level and use jig to check positioning


5. Once happy with location of the Instrument, **fill** hole using rapid hardening **concrete**. Be sure to compact concrete around legs and leave to dry according to manufactures guidelines, making sure to leave jig in place until set.

6. Once concrete has set, remove wooden jig and install notes using M8 Barrel nuts provided. Finally install beaters using fixings provided. **(See Assembly Guide)**

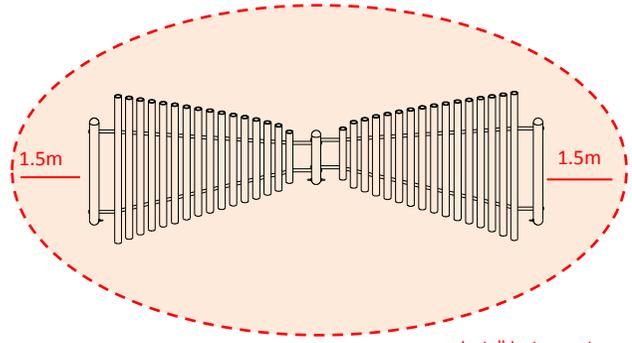

Install Instrument with 1.5m free space (from widest point) around it.

**CAUTION:** Papilio surface can get hot in direct sunlight, if possible install in shaded areas.

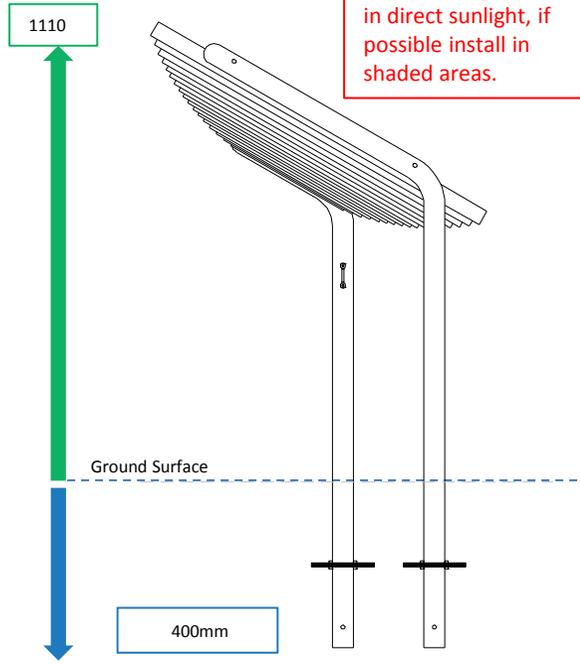

Weight of heaviest part **13kg** (Notes)

Ground Fixed  
Papilio Bells  
Page 1 of 3



Instrument Components:

-  x8  
M8 Barrel Nuts
-  X4  
Eye Straps
-  X8  
M6x20mm Secure Screw

Metric Conversion:  
250mm/ 10"  
400mm/ 16"  
1110mm/ 44"  
1.5m/ 59"



Ground Fix Components:

-  x6  
M10x150 Bolt
-  x12  
M10 Nut

Spares available form  
[percussionplay.com](http://percussionplay.com) or from your  
local distributor

**36 Kg**

**Tools:**

 x1  
 x1

## Ground Fixed


Papilio Bells  
Page 2 of 3




### Instrument Components:

-  x8  
M8 Barrel Nuts
-  x4  
Eye Straps
-  x8  
M6x20mm Secure Screw

Thread Lock Solution  
Required (Not Supplied)

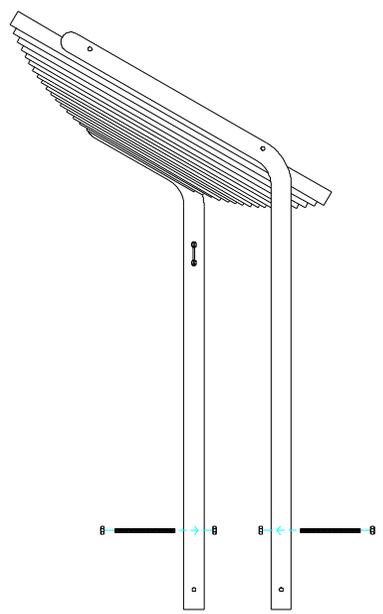

**CAUTION:** Papilio surface can get hot in direct sunlight, if possible install in shaded areas.

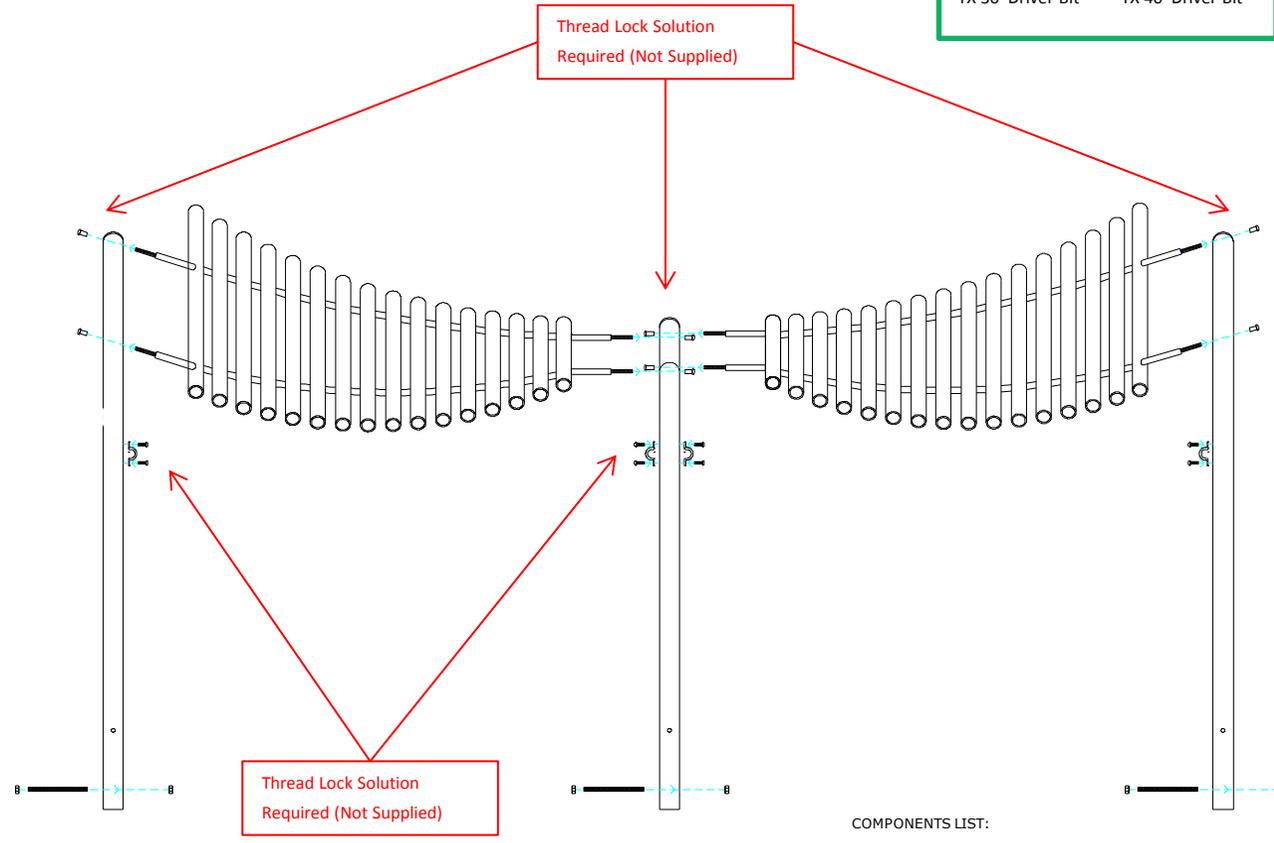

- COMPONENTS LIST:**
-  M10 Nut X12
  -  M10x150 Threaded Bar X6
  -  Saddle Strap X4
  -  M6x20 Pin torx X8
  -  M8 Barrel Nut Pin torx X8



Pair Small Red Beaters X4

### Ground Fix Components:

-  x6
-  x12


Spares available from  
[percussionplay.com](http://percussionplay.com) or from your  
local distributor

15 Kg



# Ground Fix Post Installation

## Ground Fixed

Papilio Bells  
Page 3 of 3

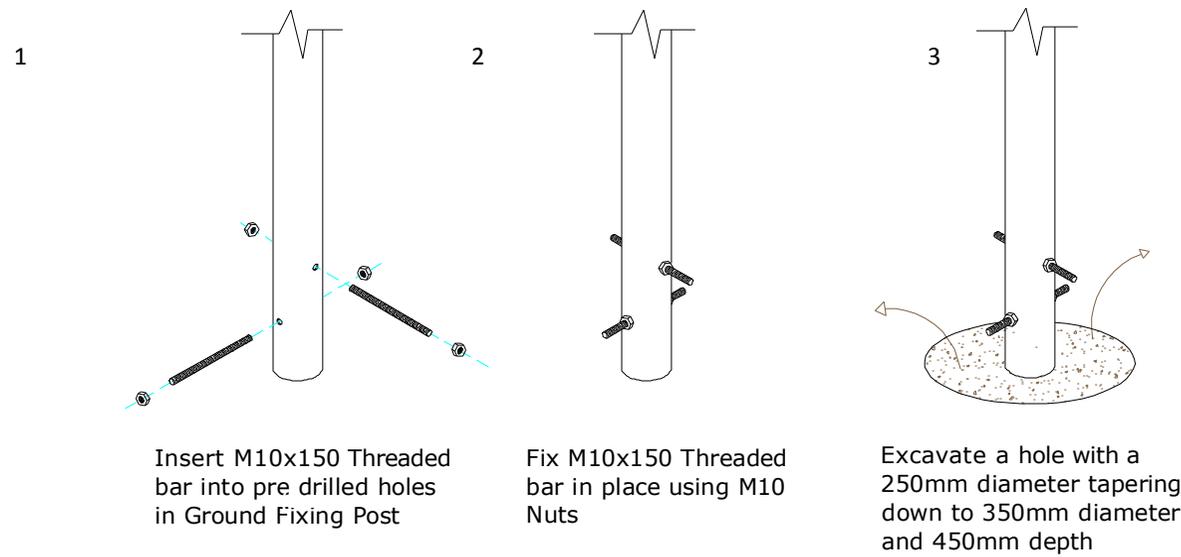

Foundations should not present a hazard. These foundations are recommended as a guide, for more information on foundation details for various surface see Part 7 of BS EN 1176.

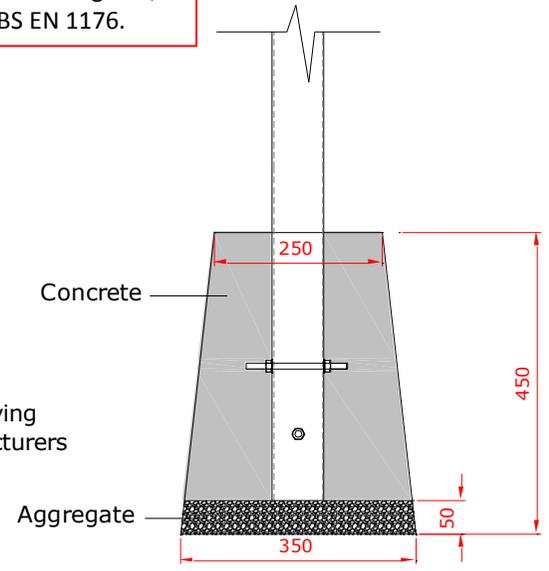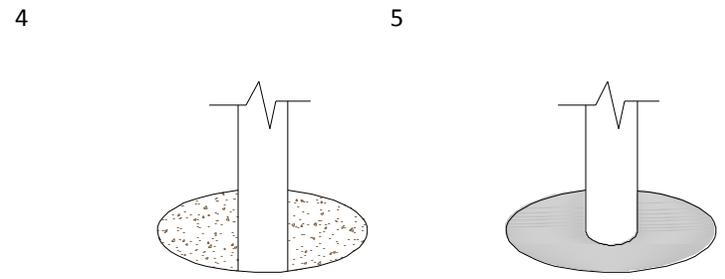

Repeat 1-5 for all 3 legs

### Components:



x6  
M10x150 Bolt



x12  
M10 Nut

Metric Conversion:  
50mm/ 2"  
250mm/ 10"  
350mm/ 14"  
400mm/ 16"  
450mm/ 18"